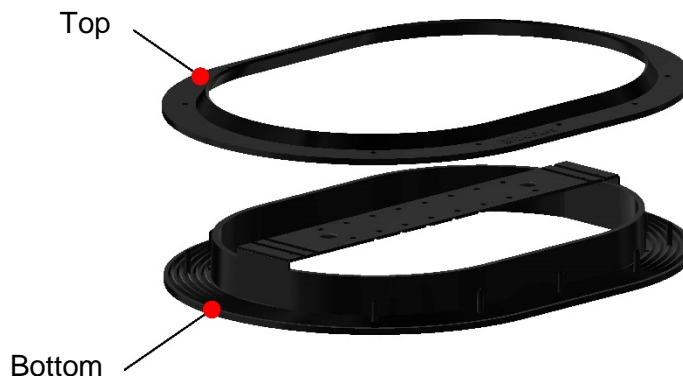


Döcke Hydroseal 172x250
1. Product description and usage.

Döcke hydroseal 170x250 (further – «product») designed to protect insulation from condensed water vapor and water in the spot where ventilation pipe passes through water/windproof membrane. The kit includes: the product (consists of a top part and a bottom part), installation manual.


2. Geometrical parameters of the assembled waterlock

No	Indicators description, units measurements	Value
1	Length, mm	316
2	Width, mm	233
3	Height, mm	33
4	Ventilation pipe port, mm	172x250

3. Physical and mechanical properties

No	Indicators description, units measurements	Value
1	Operating temperature range, °C	From -40 to +80
2	Impact resistance at t - 20°C	yes
3	Raw material	Frost-resistant polypropylene

4. Logistic characteristics

No	Indicators description, units measurements	Value
1	Weight 1 piece, kg	0,185
2	Package weight (brutto), kg	2,5
3	Quantity in a package, pcs	12
4	Package dimensions (LxWxH), mm	400x300x245
5	Quantity of packages on a pallet, pcs	54
6	Weight of a pallet (brutto), kg	160
7	Pallet dimensions (LxWxH), mm	1200x1000x1907

5. Rules of storage.

- Transportation of products should be performed on vehicles with covered or tilted bodies.
- The goods must be stored only within manufacturer's original packaging
- The goods must be stored in conditions that prevent contact with moist and direct sunlight
- The goods must be stored only in indoor ventilated space, at temperature from -35°C to +50°C and relative air humidity 50-60%.
- In case of long-term storage (over 10 days) it is necessary to use pallets or racks. The height of boxes or packages stacked on top of each other must not exceed 1,5 meters.
- Strictly prohibited to store products:
 - without original packaging;
 - under direct sunlight;
 - in 1 meter or closer to heating devices

Technical support service: 8 800 100 71 45, www.docke.ru.