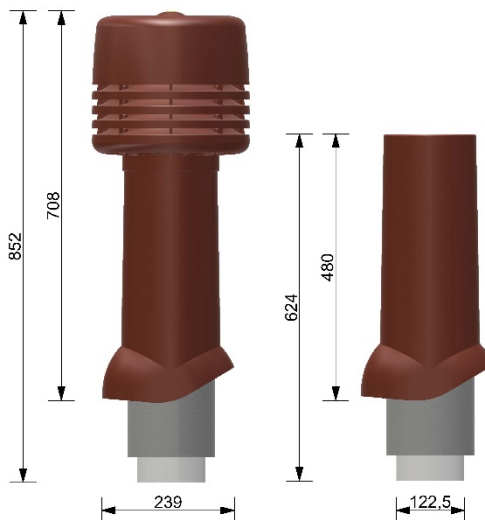


Döcke PREMIUM Ventilation outlet ISL-125/700/ pipe
1. Product description and usage.

Döcke PREMIUM ventilation outlet ISL-125/700/ pipe (further – «product») designed for normalization of pressure inside the collection system. The product is installed onto pass-through element for the corresponding type of roof cover. Colors of the product – green (analog RR11), light-brown (analog RAL8017), red (analog RR29), grey (analog RR23), dark brown (analog RR32), black (analog RR33). The kit includes: the product without a cap (collection cap is sold separately), a set of screws in matching color.


2. Geometrical parameters (without a cap).

No	Indicators description, units measurements	Value
1	Length without cap, mm	624
2	Total length with cap, mm	852
3	Width (at the widest spot without cap), mm	239
4	Diameter of plastic pipe, mm	122,5

3. Physical and mechanical properties.

No	Indicators description, units measurements	Value
1	Operating temperature range, °C	from -40 to +80
2	Impact resistance at t - 20°C	yes
3	Resistance to UV impact	yes
4	Raw material	polypropylene
5	Medium thickness of polyurethane foam insulation of a ventilation outlet casing, mm	22

4. Logistic characteristics (without a cap).

No	Indicators description, units measurements	Value
1	Weight 1 piece, kg	1,92
2	Package weight (brutto), kg	2,3
3	Quantity in a package, pcs	1
4	Package dimensions (LxWxH), mm	640x250x190
5	Quantity of packages on a pallet, pcs	54
6	Pallet dimensions (LxWxH), mm	1200x1000x2000

5. Characteristics of the completed fixture.

No	Unit	Quantity, pcs
1	Painted roofing self-tapping screw with a press washer 4,8x25 mm and with a hexagon head 8 mm (for fixing the base)	6

6. Rules of storage.

- Transportation of products should be performed on vehicles with covered or tilted bodies.
- The goods must be stored only within manufacturer's original packaging
- The goods must be stored in conditions that prevent contact with moist and direct sunlight
- The goods must be stored only in indoor ventilated space, at temperature from -35°C to +50°C and relative air humidity 50-60%.
- In case of long-term storage (over 10 days) it is necessary to use pallets or racks. The height of boxes or packages stacked on top of each other must not exceed 1,5 meters.
- Strictly prohibited to store products:
 - without original packaging;
 - under direct sunlight;
 - in 1 meter or closer to heating devices.

Technical support service: 8 800 100 71 45, www.docke.ru.