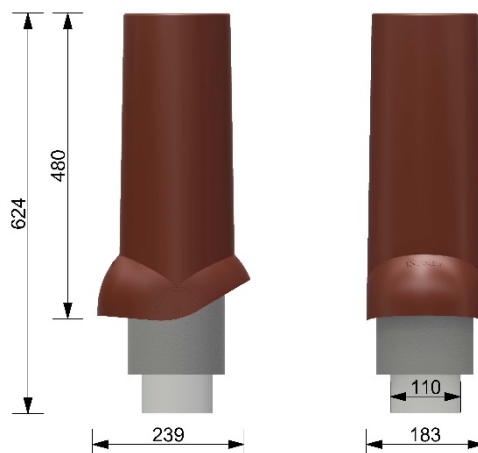


**Döcke PREMIUM Sewer outlet ISL-110/500/ pipe**
**1. Product description and usage.**

Döcke PREMIUM Sewer outlet ISL-110/500/ pipe (further – «product») designed for normalization of pressure inside the collection system. The product is installed onto pass-through element for the corresponding type of roof cover. Colors of the product – green (analog RR11), light-brown (analog RAL8017), red (analog RR29), grey (analog RR23), dark brown (analog RR32), black (analog RR33). The kit includes: the product without a cap (collection cap is sold separately), a set of screws in matching color.


**2. Geometrical parameters (without a cap).**

No	Indicators description, units measurements	Value
1	Total length with cap, mm	624
2	Width (at the widest spot without cap), mm	239
3	Diameter of plastic pipe, mm	110

**3. Physical and mechanical properties.**

No	Indicators description, units measurements	Value
1	Operating temperature range, °C	from -40 to +80
2	Impact resistance at t - 20°C	yes
3	Resistance to UV impact	yes
4	Raw material	polypropylene
5	Medium thickness of polyurethane foam insulation of a ventilation outlet casing, mm	28

**4. Logistic characteristics (without a cap).**

No	Indicators description, units measurements	Value
1	Weight 1 piece, kg	2
2	Package weight (brutto), kg	2,38
3	Quantity in a package, pcs	1
4	Package dimensions (LxWxH), mm	630x245x190
5	Quantity of packages on a pallet, pcs	54
6	Pallet dimensions (LxWxH), mm	1200x1000x2000

**5. Characteristics of the completed fixture.**

No	Unit	Quantity, pcs
1	Painted roofing self-tapping screw with a press washer 4.8x25 mm and with a hexagon head 8 mm (for fixing the base)	6

**6. Rules of storage.**

- Transportation of products should be performed on vehicles with covered or tilted bodies.
- The goods must be stored only within manufacturer's original packaging
- The goods must be stored in conditions that prevent contact with moist and direct sunlight
- The goods must be stored only in indoor ventilated space, at temperature from -35°C to +50°C and relative air humidity 50-60%.
- In case of long-term storage (over 10 days) it is necessary to use pallets or racks. The height of boxes or packages stacked on top of each other must not exceed 1,5 meters.
- Strictly prohibited to store products:
  - without original packaging;
  - under direct sunlight;
  - in 1 meter or closer to heating devices.

Technical support service: 8 800 100 71 45, [www.docke.ru](http://www.docke.ru).