


Facade Shingles Döcke PREMIUM

1. Product description.


Facade piece material "Facade Shingles Döcke PREMIUM" – an exterior wall decoration material in the form of a flat sheet, made of impregnated SBS-modified bitumen fiberglass with figured cuts along one edge of the sheet. The upper surface of the shingles is covered with basalt granulate tipped to bitumen. The lower surface of the shingles is covered with fine-grained sand, as well as with transportation films. The warranty period is 30 years.

2. Product usage.

Facade piece material "Facade Shingles Döcke PREMIUM" is a type of bitumen shingle and is intended for use on the exterior walls of buildings and structures.

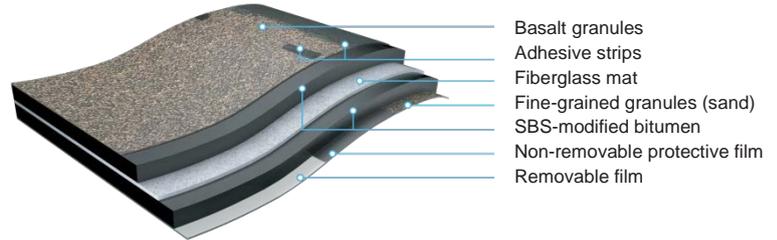

3. Geometric parameters.

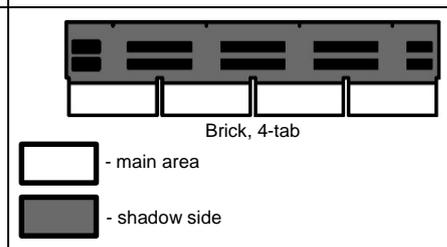№	Indicators description, units measurements	Value
		BRICK
1	Shape cut and the dressing compound area of the front side of a shingle	 <p style="text-align: center;">Brick, 4-tab</p> <p> - main area - shadow side </p>
2	Length, mm	1000 ± 3
3	Thickness, mm	3,0 ± 0,2
4	Width, mm	250 ± 3
5	Overlap index	2,5

4. Physical and mechanical properties.

№	Indicators description, units measurements	Value
1	Maximum tensile force in the longitudinal direction, N, not less than	600
2	Maximum tensile force in the transverse direction, N, not less than	400
3	Tensile strength of the nail, N, not less than	130
4	Heat resistance of the material, 2 hours at a temperature, °C, not lower than	100
5	Flexibility of material on the bar R = 25 ± 0.2 mm, °C, not higher	-10
6	Loss of granules or scales of sprinkling, gram per sample, not more than	1,0
7	Resistance to aging under the influence of artificial climatic factors	Pass (60 cycles)
8	Water absorption for 24 hours,% mass, not more than	2
9	Resistance to blistering	Stable

5. Logistics characteristics.

№ n/n	Indicators description, units measurements	Value
		BRICK
1	Bundles on a pallet	56
2	Number of sheets in a package, pcs.	20
3	Gross weight of one package, kg	24,9
4	Gross pallet weight, kg	1395
5	Covering surface per package, m ²	2

6. Storage rules.

- Products must be stored in the original packaging of the manufacturer on pallets. Violation of the manufacturer original packaging is strictly prohibited.
- Products must be stored only in a closed and dry room at a distance of at least 1,5 m from the heaters.
- Stacking the pallets on top of each other is prohibited.
- Products must be stored at a temperature not lower than -40 °C and not above +50 °C.
- Products must be stored at a relative air humidity of not more than 80 %.
- Avoid exposure to direct sunlight during storage.
- Stacking of packs - no more than 16 rows in height

Technical support service: 8 800 100 71 45, www.docke.ru.